

The data to be read in conjunction with the Hydrogen Thyatron Preamble.

ABRIDGED DATA

Deuterium-filled, two-gap, high voltage thyatron with ceramic/metal envelope, featuring low jitter, firing time and drift. The design of the control grids permits heavy pre-triggering, which allows the thyatron to switch high peak currents at very high rates of rise of current. Also suitable for switching long pulses.

A reservoir normally operated from a separate heater supply is incorporated. The reservoir heater voltage can be adjusted to a value consistent with anode voltage hold-off in order to achieve the fastest rate of rise of current possible from the tube in the circuit.

Peak forward anode voltage	70	kV max
Peak anode current	4.0	kA max
Average anode current	2.0	A max
Rate of rise of current	> 150	kA/ μ s

GENERAL DATA

Electrical

Cathode (connected internally to one end of heater)	oxide coated
Cathode heater voltage	6.3 $\begin{matrix} + 0.3 \\ - 0.0 \end{matrix}$ V
Cathode heater current	22.5 A
Reservoir heater voltage (see note 1)	5.0 V
Reservoir heater current	7.0 A
Tube heating time (minimum)	15 min
Inter-electrode capacitances (approximate):	
anode to gradient grid	15 to 20 pF
gradient grid to grid 2	15 to 20 pF

Mechanical

Seated height	261.0 mm (10.28 inches) max
Clearance required below mounting flange	38.1 mm (1.500 inches) min
Overall diameter (mounting flange)	111.1 mm (4.375 inches) nom
Net weight	3.0 kg (6 $\frac{1}{2}$ pounds) approx
Mounting position (see note 2)	any
Tube connections	see outline

Cooling	liquid or forced-air
Liquid	oil or coolant immersion
Forced-air	see below

Cooling by oil or coolant immersion is preferred in view of the high voltages present. Further information is contained in the relevant section of the Preamble.

Below 50 kV, the tube may be cooled by forced-air directed mainly onto the base, and the metal/ceramic envelope should be maintained below the maximum rated temperature. An air flow of at least 2.83 m³/min (100 ft³/min), depending on the mechanical layout, will be necessary to keep the tube operating temperatures under the limits specified below.



In addition to 200 W of heater power, the tube dissipates from 100 W per ampere average anode current, rising to 300 W/A at the highest rates of rise and fall of anode current.

The cathode end of the tube must be cooled whenever heater voltages are applied, since the cathode flange will reach a temperature of 120 °C above ambient in the absence of cooling.

Envelope temperature:

ceramic, anode and grids	150	°C max
cathode flange and base	120	°C max

MAXIMUM AND MINIMUM RATINGS (Absolute values)

These ratings cannot necessarily be used simultaneously, and no individual rating must be exceeded.

	Min	Typical	Max	
Anode (Pulse Modulator Conditions)				
Peak forward anode voltage	-	-	70	kV
Peak inverse anode voltage (see note 3)	-	-	70	kV
Peak anode current	-	3.0	-	kA
Peak anode current (pulse repetition rate limited to 60 pps max)	-	-	4.0	kA
Average anode current	-	-	2.0	A
Rate of rise of anode current (see notes 4 and 5)	-	10	-	kA/ μ s
Pulse repetition rate (see note 6)	-	400	-	pps

	Min	Max	
Anode (Single Shot or Fault Conditions)			
DC forward anode voltage	-	60	kV
Peak anode current	-	10	kA
Total conducted charge:			
capacitor discharge	-	0.1	C
fault conditions (see note 7)	-	4.0	C
Repetition frequency	1 pulse per 10 s	max	

Grid 2

Unloaded grid 2 drive pulse voltage (see note 8)	500	2000	V
Grid 2 pulse duration	0.5	-	μ s
Rate of rise of grid 2 pulse (see note 5)	20	-	kV/ μ s
Grid 2 pulse delay	0.5	3.0	μ s
Peak inverse grid 2 voltage	-	450	V
Loaded grid 2 bias voltage (see note 9)	-50	-200	V
Forward impedance of grid 2 drive circuit	50	500	Ω

Grid 1

Peak grid 1 drive current	25	80	A
Unloaded grid 1 drive pulse voltage (see note 8)	300	2000	V
Grid 1 pulse duration	0.5	-	μ s
Rate of rise of grid 1 pulse	500	-	V/ μ s
Peak inverse grid 1 voltage	-	450	V
Loaded grid 1 bias voltage	see note 10		

Grid 0

Pulsed with 10% of grid 1 pulse or DC primed with 100 mA ($\pm 20\%$) from a 150 V ($\pm 20\%$) source or connected directly to the cathode flange.

Cathode

Heater voltage	6.3	6.8	V
Heating time	15	-	min

Reservoir

Heater voltage (see note 1)	4.5	6.5	V
Heating time	15	-	min

Environmental

Ambient temperature	-50	+90	$^{\circ}$ C
Altitude	-	3	km
	-	10 000	ft

CHARACTERISTICS

	Min	Typical	Max	
Critical DC anode voltage for				
conduction (see note 11)	-	3.0	5.0	kV
Anode delay time				
(see notes 11 and 12)	-	0.1	0.25	μ s
Anode delay time drift				
(see notes 11 and 13)	-	15	50	ns
Time jitter (see note 11)	-	1.0	5.0	ns
Cathode heater current				
(at 6.3 V)	20	22.5	25	A
Reservoir heater current				
(at 5.0 V)	6.0	7.0	8.0	A

NOTES

- The reservoir heater must be decoupled with a suitable capacitor to avoid damage by spike voltages. The recommended reservoir heater voltage is stamped on individual tube envelopes. For maximum rate of rise of current, this voltage should be set to the highest level compatible with maintenance of anode voltage hold-off. The reservoir voltage should be stabilised to ± 0.05 V.
- The tube must be fitted using its mounting flange.
- The peak inverse voltage including spike must not exceed 10 kV for the first 25 μ s after the anode pulse. Amplitude and rate of rise of inverse voltage contribute greatly to tube dissipation and electrode damage; if these are not minimised in the circuit, tube life will be shortened considerably. The aim should be for an inverse voltage of 3 - 5 kV peak with a rise time of 0.5 μ s.
- For single shot, very low frequency and burst mode applications this parameter can exceed 150 kA/ μ s. The ultimate value which can be attained depends to a large extent upon the external circuit.
- This rate of rise refers to that part of the leading edge of the pulse between 25% and 75% of the pulse amplitude.
- Triggered charging techniques are recommended because this thyratron has a long recovery time (100 - 200 μ s) due to the gradient grid drift space. The amount of time required for recovery is affected by gas pressure, peak current, pulse duration and load mismatch which keeps the thyratron in a conducting state.
- Under fault conditions, most of the coulombs are often in the power supply follow-on current, rather than the storage capacitor discharge.
- Measured with respect to cathode. When grid 1 is pulse driven, the last 0.25 μ s of the top of the grid 1 pulse must overlap the corresponding first 0.25 μ s of the top of the delayed grid 2 pulse.
- A negative bias must be applied to grid 2 to ensure reliable anode voltage hold-off. The higher grid 1 is pulsed, the larger must the grid 2 negative bias be, to prevent the tube firing on the grid 1 pulse.
- DC negative bias voltages must not be applied to grid 1.
- Typical figures are obtained on test using conditions of minimum grid drive. Improved performance can be expected by increasing grid drive.

12. The time interval between the instant at which the rising unloaded grid 2 pulse reaches 25% of its pulse amplitude and the instant when anode conduction takes place.
13. The drift in delay time over a period from 10 seconds to 10 minutes after reaching full voltage.



High Voltage

Equipment must be designed so that personnel cannot come into contact with high voltage circuits. All high voltage circuits and terminals must be enclosed and fail-safe interlock switches must be fitted to disconnect the primary power supply and discharge all high voltage capacitors and other stored charges before allowing access. Interlock switches must not be bypassed to allow operation with access doors open.



X-Ray Radiation


All high voltage devices produce X-rays during operation and may require shielding. The X-ray radiation from hydrogen thyratrons is usually reduced to a safe level by enclosing the equipment or shielding the thyatron with at least 1.6 mm ($1/16$ inch) thick steel panels.

Users and equipment manufacturers must check the radiation level under their maximum operating conditions.

HEALTH AND SAFETY HAZARDS

E2V Technologies hydrogen thyratrons are safe to handle and operate, provided that the relevant precautions stated herein are observed. E2V Technologies does not accept responsibility for damage or injury resulting from the use of electronic devices it produces. Equipment manufacturers and users must ensure that adequate precautions are taken. Appropriate warning labels and notices must be provided on equipments incorporating E2V Technologies devices and in operating manuals.

SCHEMATIC DIAGRAM

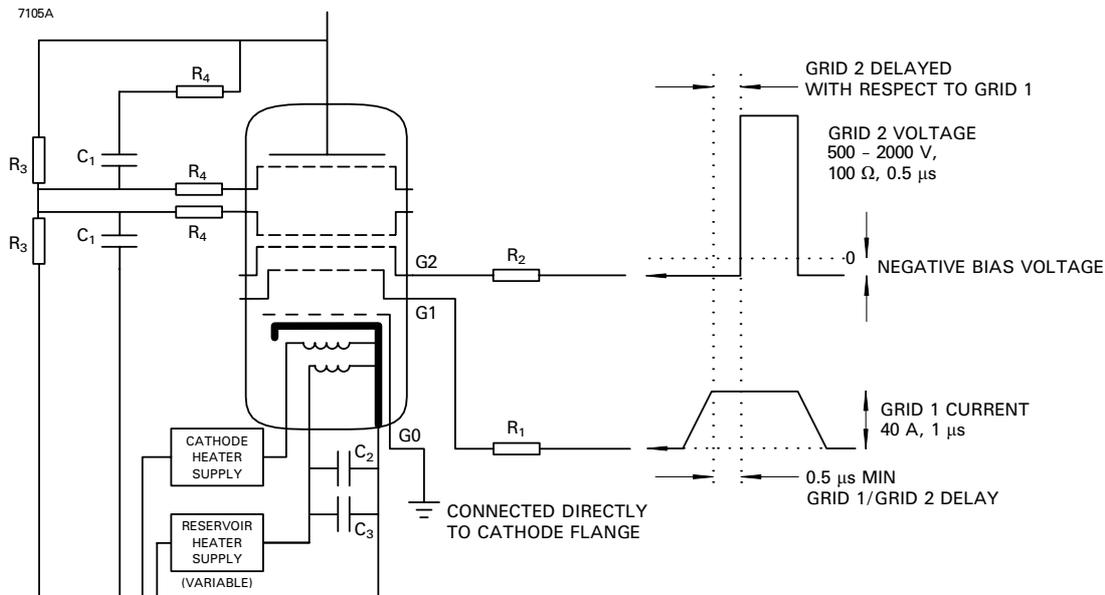

RECOMMENDED GRID, CATHODE AND RESERVOIR HEATER CONNECTIONS


- R_1 = Grid 1 series resistor. 12 W vitreous enamelled wirewound is recommended, of a total impedance to set the grid 1 pulse current.
- R_2 = Grid 2 series resistor. 12 W vitreous enamelled wirewound is recommended, of an impedance to match the grid 2 drive pulse circuit.
- R_3 = 5 to 25 M Ω high voltage resistors with a power rating consistent with the forward anode voltage.
- R_4 = 470 Ω 2.5 W vitreous enamelled wirewound resistors.
- C_1 = 300 to 500 pF capacitors with a voltage rating equal to the peak forward voltage. These capacitors may be needed to correctly divide the voltage across each gap when charging times are less than 5 ms approx.
- C_2, C_3 = Reservoir protection capacitors with a voltage rating ≥ 500 V;
 - C_2 = 1000 pF low inductance (e.g. ceramic),
 - C_3 = 1 μ F (e.g. polycarbonate or polypropylene).

Components R_1 , R_2 , C_2 and C_3 should be mounted as close to the tube as possible.

OUTLINE

(All dimensions without limits are nominal)

7106

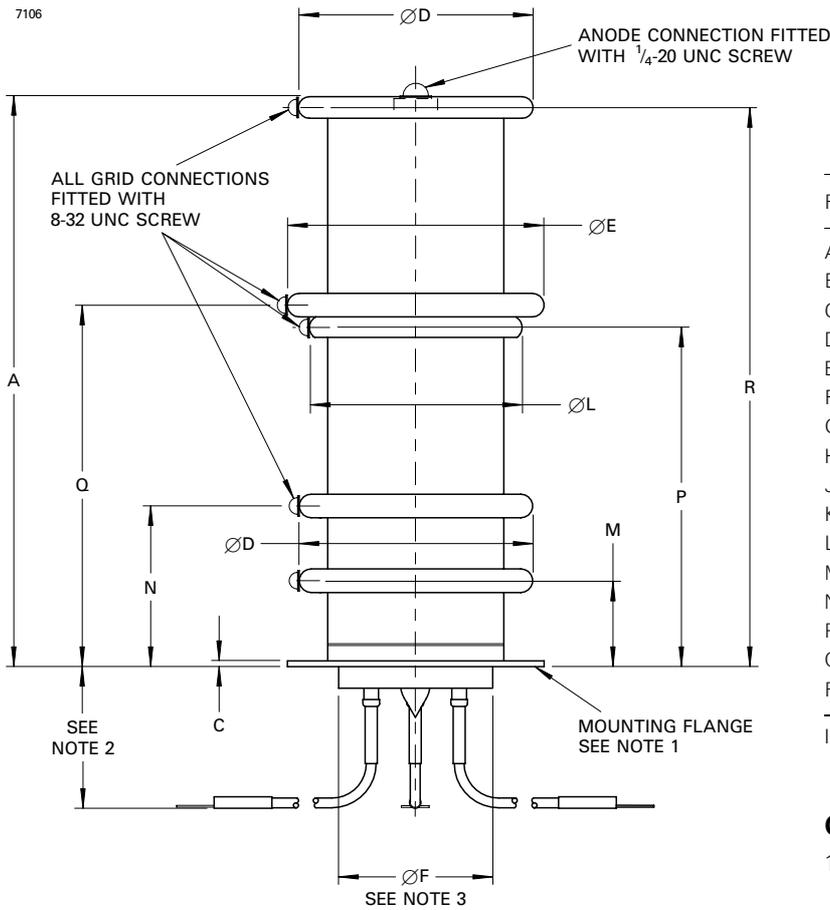


Ref	Milimetres	Inches
A	261.0 max	10.276 max
B	4.375	111.13
C	2.50 ± 0.25	0.098 ± 0.010
D	101.6 ± 1.6	4.000 ± 0.063
E	111.13 ± 1.60	4.375 ± 0.063
F	69.85 max	2.750 max
G	6.5	0.256
H	95.25	3.750
J	190.5 min	7.500 min
K	6.35	0.250
L	92.08 ± 1.60	3.625 ± 0.063
M	43.36	1.707
N	75.95	2.990
P	153.64	6.049
Q	163.14	6.423
R	249.45	9.821


Inch dimensions have been derived from millimetres.

Outline Notes

1. The mounting flange is the connection for the cathode, cathode heater return and reservoir heater return.
2. A minimum clearance of 38.1 mm (1.500 inches) must be allowed below the mounting flange.
3. The recommended mounting hole is 73.0 mm (2.875 inches) diameter.

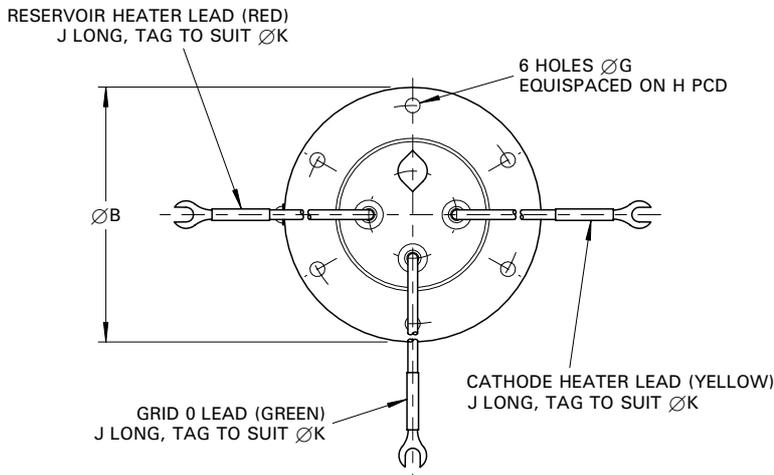

Detail of Gradient Grid Connections (See page 3)

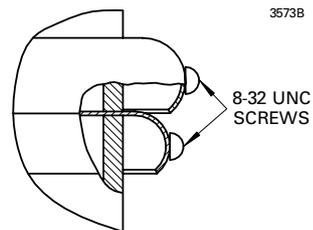

Whilst E2V Technologies has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. E2V Technologies accepts no liability beyond that set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.